


AIRFOIL DIAMETER	5ft	6ft	7ft	8ft
Airfoil Material	6061-T6 Aircraft Grade Aluminum			
Number of Airfoils	4			
Airfoil Finish Colors	Fresh White, Matte Silver, Matte Black			



PERFORMANCE	5ft	6ft	7ft	8ft
Max Speed (MPH)	8	8	8	8
Recommended Spacing	20ft	24ft	28ft	30ft
Max Affected Area (SQFT)	400	576	784	1024
Sound Level dBA at Max Speed	50.8	46.7	53.9	53.7
Air Volume (CFM)*	13,032	17,895	22,110	24,758

HANGING REQUIREMENTS	5ft	6ft	7ft	8ft
Hanging Weight (lbs)	48	48.5	49	49.5

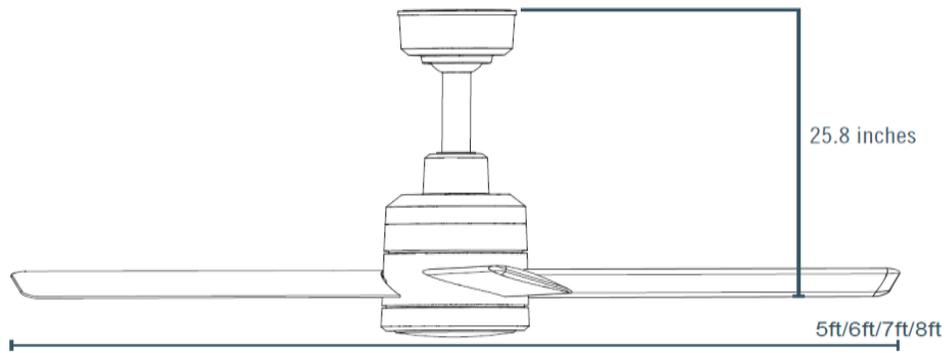

MOTOR	5ft	6ft	7ft	8ft
Motor Type	Reversible, 8-Speed DC Motor			
Max Watts	91.2	103	90.7	118.7

MAX AMP DRAW	5ft	6ft	7ft	8ft
120V Single Phase	1.16A			
240V Single Phase	0.52A	0.68A	0.65A	0.68A

**POWER AND CONTROLS**

Power Source	AC 1PH 100-120V 50-60HZ, AC 1PH 200-240V 50-60HZ
Control Options	Remote Control Included

**INSTALLATION**

Mounting Options	Standard/Angled
Downrod Length	11in Standard Downrod Optional downrod sizes: 24in, 36in, 48in, 60in, 72in
Motor Wiring	Pre-wired motor cables, pre-assembled downrod

**RATING AND COMPLIANCE**

Wash Down Duty Rating	UL 507 Damp Rated
Certifications	ETL/Intertek-certified to ANSI/UL 506 and CSA C22.2 No. 113 in North America International Low Voltage Directive: 2014/35/EU. IEC / EMC / CE
Safety Features	Safety Retention Cable
Warranty	3 Year Warranty